

SPERANO Pendant
3-6118-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-15 Black



-40 Aged Brass

LIGHT SOURCE	(6x) 5W LED Array, 3000K, CRI 90
LUMINAIRE POWER	TBD
RATED LIFE	50000 hr RL
OPTIONAL COLOR TEMPERATURES	Field Selectable 3000K/3500K/4000K Note: Oxygen Standard setting is 3000K
LUMEN OUTPUT	TBD Lm (LM-79)
INPUT VOLTAGE	120-277V
DRIVER OUTPUT	TBD
DIMMING	10-100%
CONSTRUCTION	Steel , Glass
DIFFUSER	Clear Textured Glass
FINISHES	-15 Matte Black
MOUNTING	Unit Mounts to a 4" Octagonal J box
STANDARDS	UL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 NO. 250.0

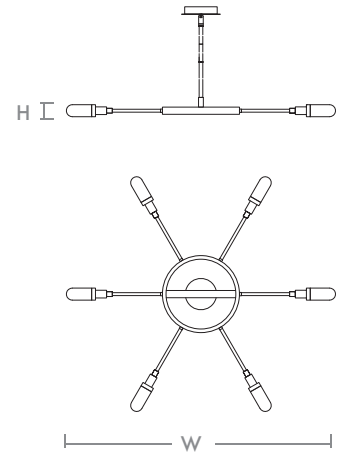

DIMENSIONS

W: 44"
H: 3.125"
OAH: Adjustable Using 8", 12", 15"
Rod Segments (Included)

Order example for standard fixture:
3-6118-XX (x-xxx: LED Sequence # / -xx: Finish)

