


**LUNA Pendant**  
**3-672-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
 PROJECT \_\_\_\_\_ DATE \_\_\_\_\_



|                                    |   |
|------------------------------------|---|
| <b>LIGHT SOURCE</b>                | 1 x 10.1W LED, 3000K, CRI 90  |
| <b>LUMINAIRE POWER</b>             | 12.4 W at 120V  |
| <b>RATED LIFE</b>                  | 60000 hr RL   |
| <b>OPTIONAL COLOR TEMPERATURES</b> | 2700K, 3500K, 4000K   |
| <b>LUMEN OUTPUT</b>                | Delivered: 714lm (LM-79)  |
| <b>INPUT VOLTAGE</b>               | 120V to 277V AC, 50/60Hz  |
| <b>DRIVER OUTPUT</b>               | 350mA, 14.7W max power  |
| <b>DIMMING</b>                     | TRIAC and ELV dimming at 120V AC;<br>0-10V dimming, 100% to 1% current output                                     |
| <b>CONSTRUCTION</b>                | Plated Steel and Glass  |
| <b>DIFFUSER</b>                    | - White Opal Glass  |
| <b>FINISHES</b>                    | Black (-15) Polished Nickel (-20), Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)                       |
| <b>MOUNTING</b>                    | 4" Octagonal J-Box*,<br>4" Square J-Box* with a single device mud ring<br>* Deep J-Box (Required to house driver) |
| <b>STANDARDS</b>                   | UL Dry/Damp listed, Conforms to UL STD 1598,<br>Certified CAN/CSA STD C22.2 No 250.0.                             |

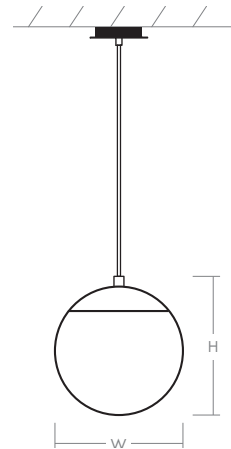

**DIMENSIONS**  
**Dia. Canopy: 5.88"**  
**W. Fixture: 10.00"**  
**H. Fixture: 13.00"**  
 Supplied with 10 ft braided cord

Order example for standard fixture:  
**3-672-24** (x- Voltage - xxx-Sequence # - xx-Finish)  
 3: 120V to 277V  
 Order example for optional color temperatures: **3-672-2724 27:**  
 2700K, 35: 3500K, 40: 4000K

